


**ASUS®**

**VA249QG/VA279QG/  
VA279HG series  
LCD Monitor**

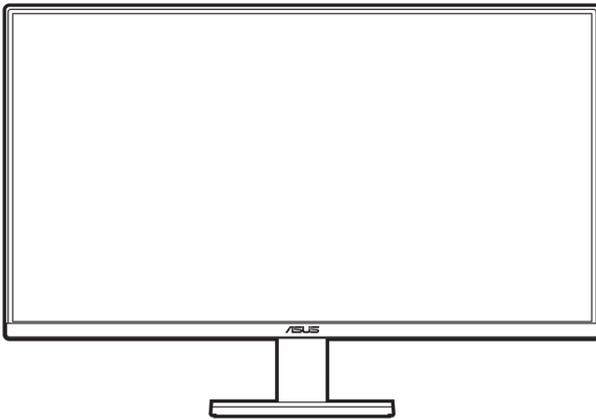

**HDMI™**

HIGH-DEFINITION MULTIMEDIA INTERFACE

# Specifications

## VA249QG/VA279QG

Panel Type	TFT LCD VA249QG: 23.8" (16:9, 60.45 cm) wide screen
Panel size	VA279QG: 27" (16:9, 68.5 cm) wide screen
Max. Resolution	1920 x 1080
Pixel pitch	VA249QG: 0.2745 mm VA279QG: 0.311 mm
Brightness (Typ.)	300 cd/m <sup>2</sup>
Contrast Ratio (Typ.)	1500:1
Contrast Ratio (Max.)	100,000,000:1 (with ASCR on)
Viewing angle (H/V) CR>10	178°/178°
Display colors	16.7 M
Response time	1 ms MPRT
Splendid Video Enhancement	Yes
Splendid selection	8 video preset modes
Auto adjustment	Yes
Color temperature selection	4 color temperatures
Analog input	D-sub
Digital input	HDMI v1.4, DisplayPort v1.2
Earphone jack	Yes
Audio input	No
Speaker (Built-in)	2 W x 2 Stereo, RMS
USB 3.2 Gen 1 port	No
Colors	White (On)/Amber (Standby)
Power LED	-5°~+23°
Tilt	No
Pivot	No
Swivel	Yes
Height Adjustment	AC: 100~240V
Kensington lock	VA249QG: Power On: < 13 W** (Typ.), Standby: < 0.5 W, Power Off: < 0.3 W
AC input voltage	VA279QG: Power On: < 15 W** (Typ.), Standby: < 0.5 W, Power Off: < 0.3 W
Power consumption	0°C~40°C
Temperature (Operating)	-20°C~+60°C
Temperature (Non-operating)	

<b>Dimension (W x H x D)</b>	VA249QG: 541.1 x 406.5 x 188.2 mm (with stand) 541.1 x 321.5 x 49.8 mm (without stand) 611 x 405 x 132 mm (package) VA279QG: 613.4 x 447.1 x 194.2 mm (with stand) 613.4 x 362.1 x 49.8 mm (without stand) 690 x 452 x 146 mm (package)
<b>Weight (Esti.)</b>	VA249QG: 2.67 kg (net without stand); 3.03 kg (net with stand); 5.09 kg (gross)  VA279QG: 3.40 kg (net without stand); 3.77 kg (net with stand); 6.37 kg (gross)
<b>Multi-languages</b>	23 languages (English, French, German, Italian, Spanish, Dutch, Portuguese, Russian, Czech, Croatian, Polish, Romanian, Hungarian, Turkish, Simplified Chinese, Traditional Chinese, Japanese, Korean, Thai, Indonesian, Persian, Ukrainian, Vietnamese)
<b>Accessories</b>	Quick start guide, warranty card, power cord, HDMI cable (optional), DisplayPort cable (optional), VGA cable (optional), phone holder stickers (optional)
<b>Compliance and Standards</b>	cTUVus, FCC, ICES-3, EPEAT Silver, CB, CE, ErP, WEEE, EU Energy label, ISO 9241-307, UkrSEPRO, Ukraine Energy Doc, CU, EAC RoHs, CCC, China Energy Label, BSMI, RCM, MEPS, VCCI, PSE, PC Recycle, J-MOSS, KC, KCC, Energy Star 8.0, TCO 9, RoHs, CEC, TÜV Flicker free, TÜV Low Blue Light, SIOC, Windows 10 & 11 WHQL, PSB, Vietnam Energy, CECP, Vietnam Energy, FSC MIX

\*Specifications are subject to change without notice.

\*\*Measuring a screen brightness of 300 nits without audio/USB/Card reader connection.