



\* All images in this datasheet are for illustrative purposes only.

## UHD Signage UL3Q Series

# LG webOS UHD Signage



Superb Picture Quality  
with Ultra HD Resolution



Face Up/Down  
with Tilt Support



Enhanced Security



High-Performance  
with webOS 6.1




Sustainability for  
ESG

### UL3Q

Inch	86" / 75" / 65" / 55" / 50" / 43"
Screen Resolution	3,840 × 2,160 (UHD)
Brightness	350 nit (Typ.)
Software Compatibility	LG SuperSign CMS / Control+ / WB / Cloud, Mobile CMS, LG ConnectedCare



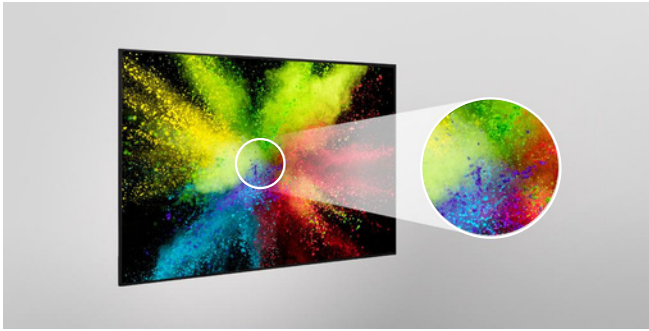

## Superb Picture Quality with Ultra HD Resolution


With the resolution of UHD, it makes the color and details of the contents vivid and realistic. In addition, the wide viewing angle provides clear contents.



## High-Performance with LG webOS 6.1

LG webOS 6.1 is available on the UL3Q series for smooth execution of multiple tasks. The LG webOS smart signage platform enhances user convenience with an intuitive GUI\*.

\* GUI : Graphical User Interface

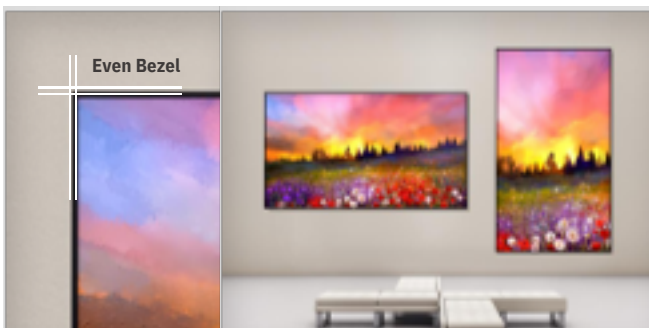

## Easy Installation with Uniform Bezel Design

The UL3Q series features perfectly balanced horizontal and vertical bezels, creating a visually harmonious display solution. Its specialized design simplifies installation in retail environments while delivering a truly immersive viewing experience. The sophisticated, symmetrical bezels enhance the aesthetic appeal of any space, transforming ordinary displays into elegant focal points.




## Adaptive Viewing Experience

Experience enhanced flexibility with the UL3Q's innovative Face Up/Down tilt support. Whether mounted high or low, each display can be adjusted to better meet viewers at eye level, promoting maximum engagement regardless of installation height. This versatility optimizes both spatial efficiency and visual comfort, delivering clear information from various viewing angles.

\* 76"/86" are not supported.

\*\* This display tilts up/down up to 15 degrees; do not exceed this range

to prevent damage.

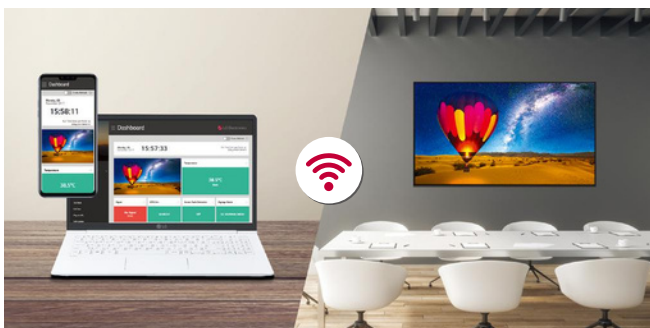

## Remote Monitoring and Control

This web-based monitoring solution is user-friendly and allows the user to be at ease. It enables the user to have full access anywhere at anytime from their mobile phone & PC under network-accessible environment while having access to both current and past data. It allows the user to monitor the unit, make adjustments and control the unit remotely in real time.



## Built-In Brightness Sensor

The UL3Q's front-mounted sensor automatically adjusts brightness to match various lighting conditions, helping to optimize viewing quality and energy efficiency without manual intervention. This adaptive feature helps maintain consistent display performance while supporting power savings, delivering improved visual experience that responds to environmental changes.



## Advanced Security Architecture

The UL3Q incorporates LG's Enhanced Kernel Protection (EKP) technology, safeguarding critical data from unauthorized access and potential security threats. This commitment to information security is validated by the ISO/IEC 15408 Common Criteria EAL2 certification, providing businesses with the confidence that their sensitive content and operations remain protected in today's challenging security landscape.



## Award-Winning Sustainability

The UL3Q series embodies LG Display's ESG commitment: "Better Life for All." This company-wide dedication to environmental responsibility has earned the prestigious 2025 EcoVadis Platinum medal, placing us among the top 1% of global companies for sustainability excellence.



## LG ConnectedCare

Maintenance is easy and fast with the optional LG ConnectedCare\* service, a cloud service solution provided by LG. It remotely manages the status of displays in client workplaces for fault diagnosis and remote-control services, supporting the stable operation of clients' businesses.

\* The availability of the 'LG ConnectedCare' service differs by region, and it needs to be purchased separately. So please contact the LG sales representative in your region for more details.

\* All images are for illustrative purposes only.

## CONNECTIVITY

86" / 75" / 65" / 55" / 50" / 43"

