






Robust ABS + PC shell ensures impact resistance, fireproofing and high-temperature resilience for constant safety and stability in network equipment.




Stable Link

IDC terminal adopts high-hardness phosphor bronze.

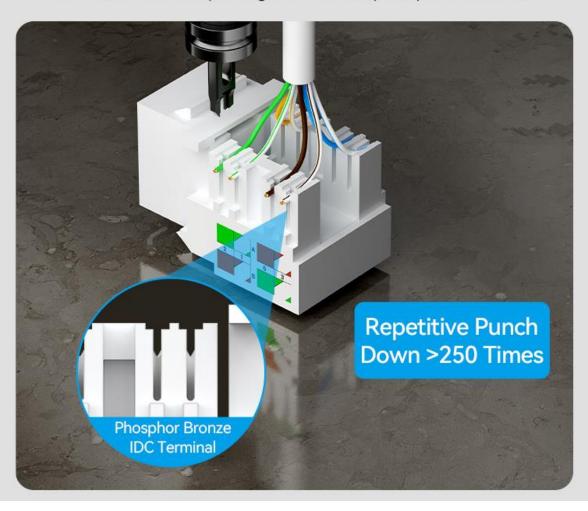





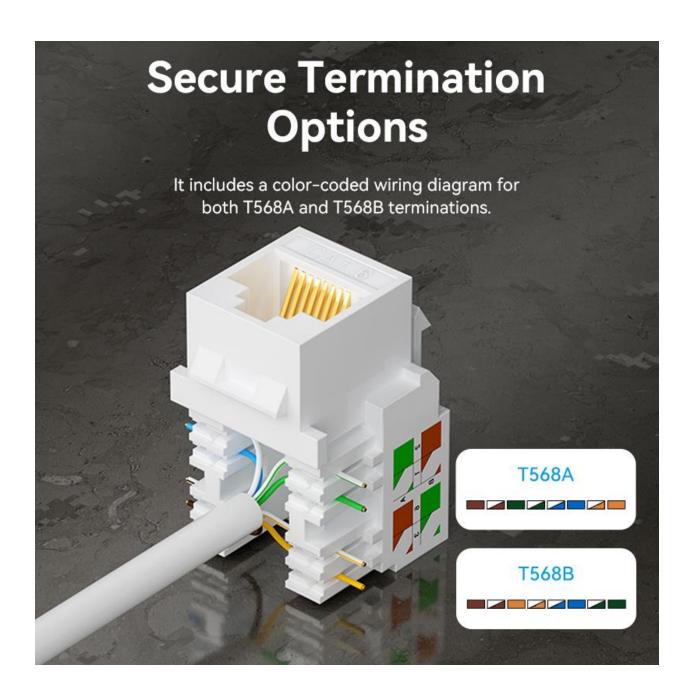



Wide Application



Home Cabling



Enterprise Network Cabling



PoE Cabling




Classroom Network Cabling



Cybercafe Cabling

Specifications

| Brand | Vention |
|----------------------------------|--------------------------|
| Name | Cat6 Unshielded Keystone |
| | Jack White Plastic Type |
| Model | IRF |
| Color | White |
| Interface | RJ45 |
| Electroplating Process | Gold-Plated |
| Shell | ABS + PC |
| Wire Terminations | ≥ 250 |
| Insertions and Removals Lifespan | ≥ 1000 Times |
| Wire Gauge | 22~26AWG |
| Compatible Wiring Standards | T568A/T568B |
| Operating Temperature | -20 °C ~ + 60 °C |
| Packing | PE Bag |
| | |

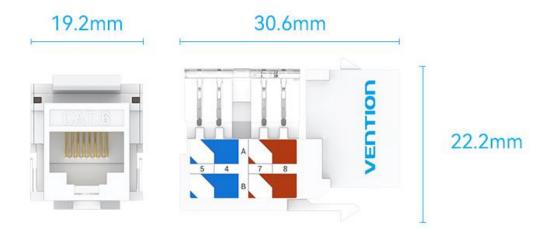

Note: All data are from Vention Lab. Sizes above are manually measured. There might be slight tolerance.



