

VENTION[®]



VENTION[®]



Computer connect printer

Signal transmission is more stable






USB2.0 High Speed Printing


Theoretical speed up to 480Mbps

USB B Square Interface

Connect sound card/external drive

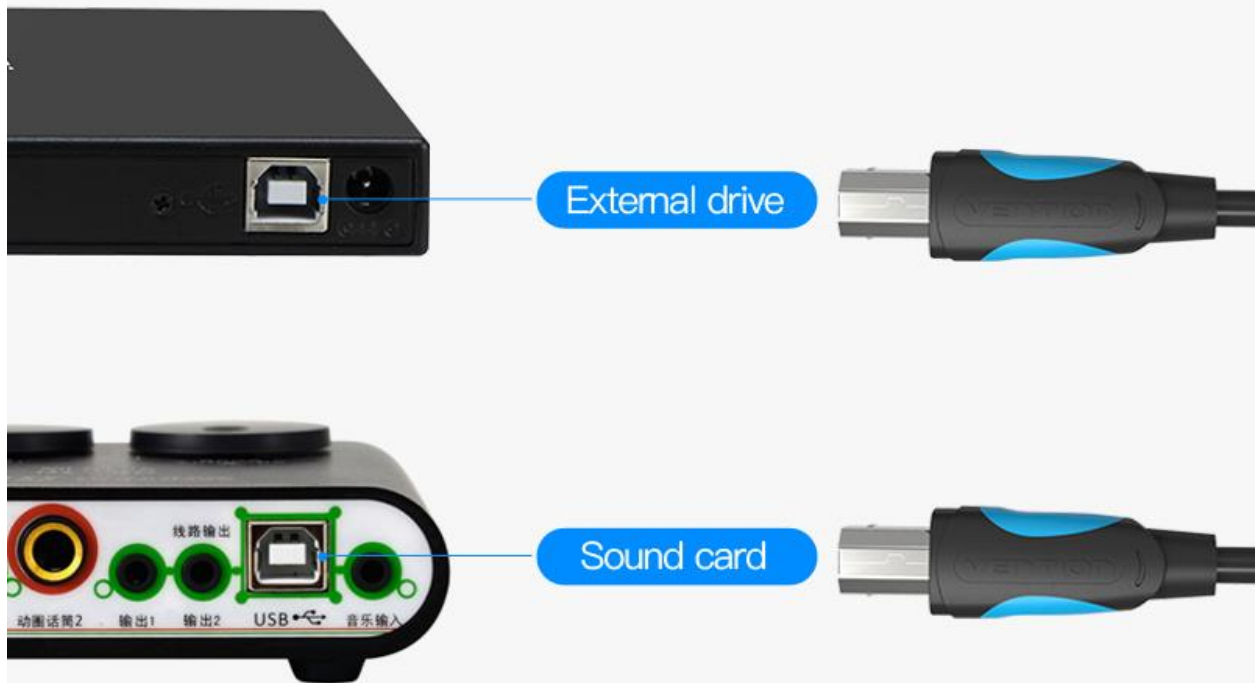

1–5m Length Optional

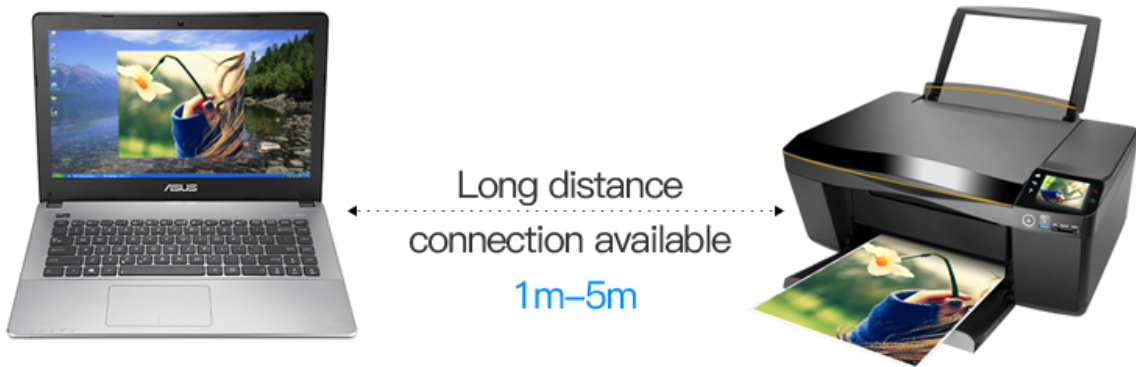




Double ferrite cores

Resist EMI/RFI electromagnetic interference

Anti-interference Protection

Aluminum Foil+Metal Braided
Signal transmission is more stable

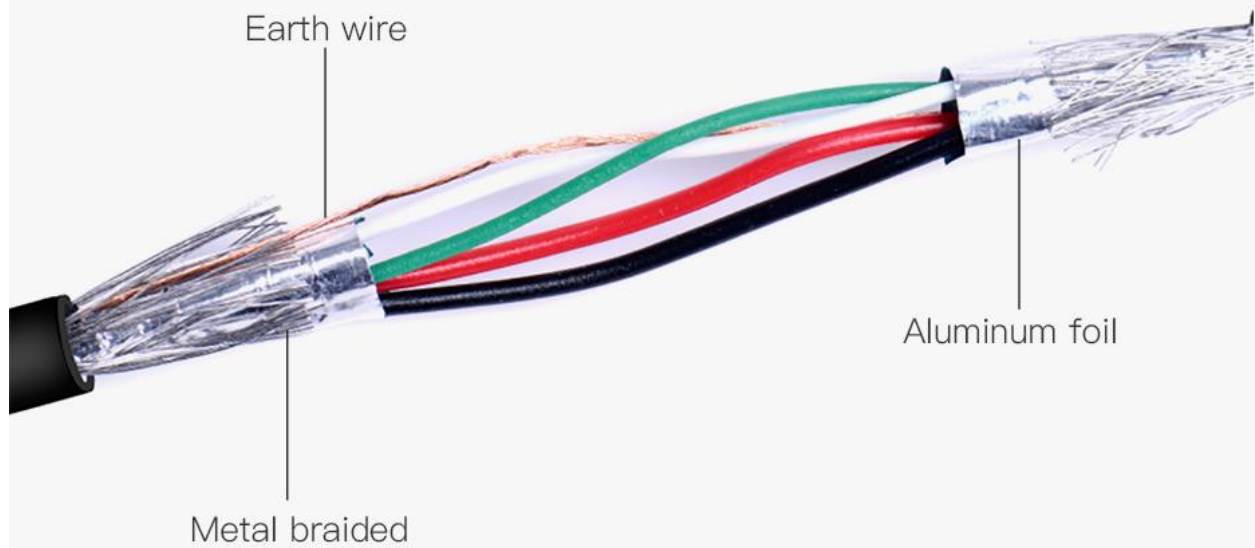

Tinned Copper Core



Improve the quality of print



Wide Compatibility

Please confirm whether the required interfaces are consistent before purchasing

Applicable interface display



**Square connector
USB2.0 printing interface**

Applicable interface



Printers



Fax machines



Scanners



All-in-one machines

Note: When the computer is connected to the printer for the first time the driver needs to be installed before it can be used



Nickel plated
Interface

Anti-oxidation

Corrosion
resistance



PVC Jacket

Flexible and durable



Different Style

No ferrite core
Black/White
1m-3m



Double ferrite cores
Black/White
5m



Plug And Play


Apply to multiple types of equipment



Drive



Sound Card



Fax machine



Printer



Scanner

Product Parameters

Brand: Vention

Name: USB2.0 Print Cable

Model: VAS-A16

Appearance Color: Black/White

Interface Type: USB A male; USB B male

Version: USB 2.0

Theoretical Speed: 480Mbps

Interface Process: Nickel plated

Conductor Material: BC

Cable Shielding: Aluminum foil+metal braided

Jacket: PVC


AWG: 24+28AWG

Cable OD: 4.5mm

Cable Length: 1m-5m

Product Warranty: One year

Package: PE bag

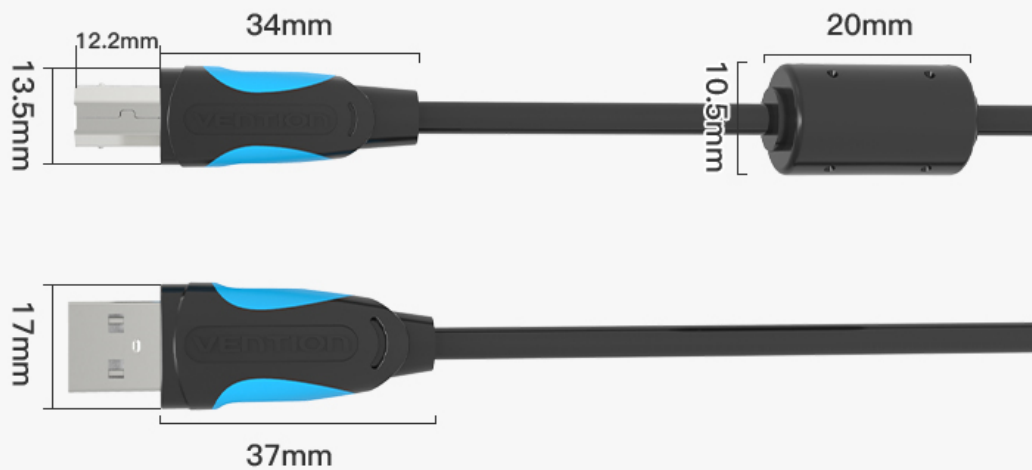





Double ferrite cores

Resist EMI/RFI electromagnetic interference

Choose as your wish

Version	 Upgraded Type	 Normal Type	 Oxygen-free Type	 USB3.0 Type
Type	USB2.0	USB2.0	USB2.0	USB3.0
Material	Tinned-copper	Tinned-copper	Oxygen-free copper	Tinned-copper
Shielding	0.5m-5m: Aluminum foil+metal braided+GND 10-15m: Aluminum foil+metal braided+GND+Double magnetic rings	1-5m: Aluminum foil+metal braided 8-10m: Aluminum foil+metal braided+double magnetic rings	Aluminum foil+metal braided	Aluminum foil+metal braided+GND
Rate	480Mbps	480Mbps	480Mbps	5Gbps